


45 mm x 62 mm x 25 mm NTN NKXR50T2+IR45 x 50 x 25 Complex bearing unit

Bearing No. NKXR50T2+IR45 x 50 x 25

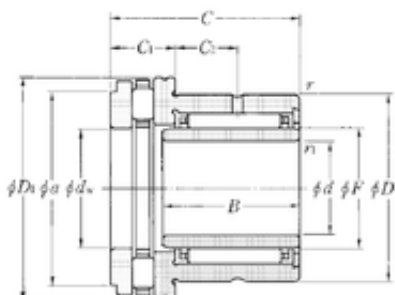

NKXR50T2+IR45 x 50 x 25 Bearing 2D drawings and 3D CAD models

Bore Diameter	45 mm
Outer Diameter	70 mm
d	45 mm
d1	50 mm
F	50 mm
D	62 mm
D1	70 mm
B	25 mm
C	35 mm
ra1 max.	0,6 mm
r min.	0,6 mm
r1 min.	0,6 mm
C1	14 mm
da min.	66 mm
db min	48 mm
ra max.	0,6 mm
C2	10 mm
Weight	0,379 Kg
Dynamic load rating radial (C)	27,9 kN
Dynamic load rating axial (C)	48 kN
Static load rating radial (C0)	62 kN
Static load rating axial (C0)	150 kN
(Grease) Lubrication Speed	1000 r/min